



MOTORE ELETTRICO AC ELECTRIC DC MOTOR

CODICE FAMIGLIA
FAMILY CODE

148

SERIE
SERIES

AC

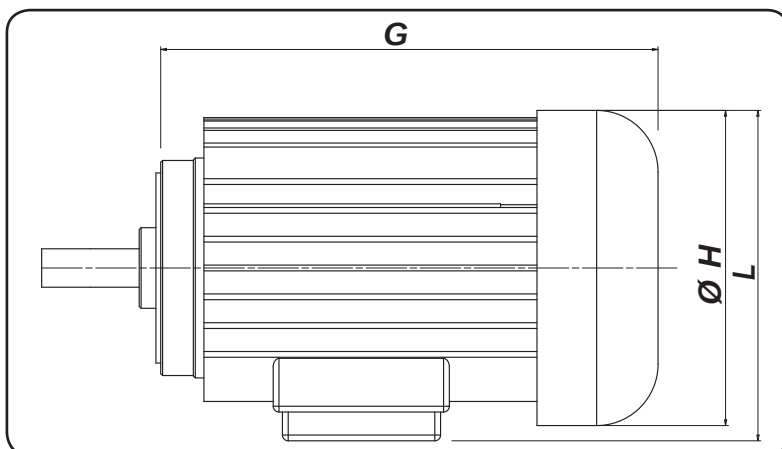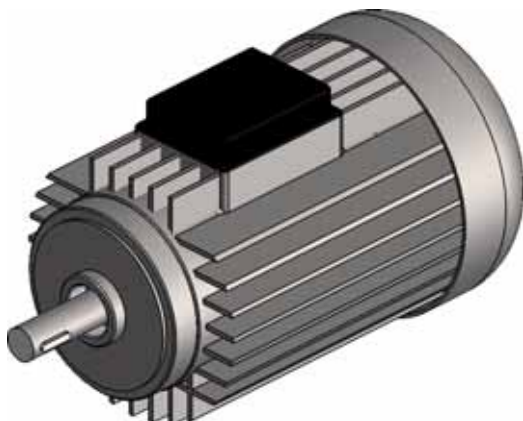

Codice fascicolo: 997-400-14810

Data: Mercoledì 16 gennaio 2013

POTENZA MOTORE MOTOR POWER (HP)	IP	TIPO MOTORE - DIMENSIONI (mm) MOTOR TYPE - DIMENSIONS (mm)											
		T4P			T2P			M4P			M2P		
		G	H	L	G	H	L	G	H	L	G	H	L
0,75	54	260	160	200	260	160	200	260	160	200			
1		260	160	200	260	160	200	260	160	200			
1,5		260	190	230	260	190	230	260	190	230			
2		280	190	230	280	190	230	280	190	230	280	190	230
3		300	200	240	300	200	240	300	200	240	300	200	240
4		320	220	260	320	220	260						


Dimensioni indicative / Approx. dimensions

T4P = Motore Trifase 4 Poli / Three-phase 4 Pole motor
T2P = Motore Trifase 2 Poli / Three-phase 2 Pole motor


M4P = Motore Monofase 4 Poli / Single-phase 4 Pole motor
M2P = Motore Monofase 2 Poli / Single-phase 2 Pole motor

POTENZA MOTORE MOTOR POWER	TIPO MOTORE - MOTOR TYPE							FLANGIA FLANGE
	TRIFASE 4P	TRIFASE 4P	TRIFASE 4P	TRIFASE 2P	TRIFASE 2P	MONOFASE 4P	MONOFASE 2P	
	220/380V	380/420V	440V	220/380V	380/420V	220V	220V	
0.75 HP	132-2-00044				132-992-00154	132-4-00042		B14
1 HP	132-2-00053	132-992-00038		132-992-00056		132-4-00051		
1.5 HP	132-2-00062	132-992-00047		132-992-00065		132-4-00060		
2 HP	132-2-00071	132-992-00092	132-992-00083	132-992-00074	132-992-00145	132-4-00079	132-994-00072	
3 HP	132-2-00099			132-992-00118		132-4-00097	132-004-00087	
4 HP	132-2-00115			132-992-00127				


MOTORE MONOFASE TIPO M-SINGLE-PHASE MOTOR TYPE M

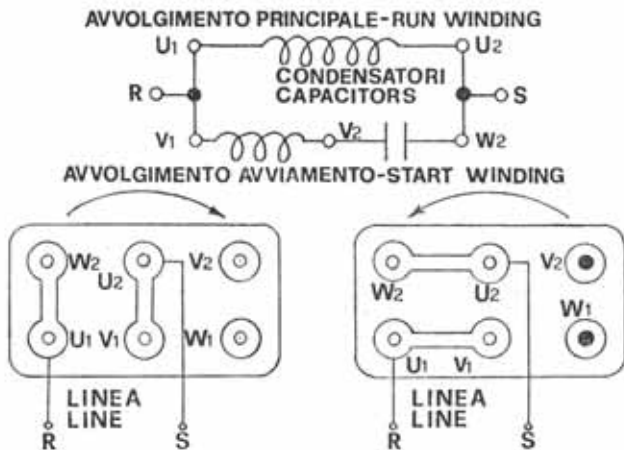


**MOTOR THREEPHASE-MOTOR
MOTORE-TRIFASE**

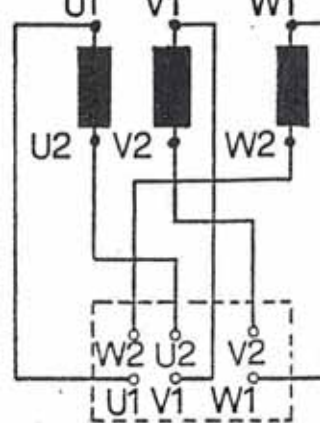

Δ - CONNECTION COLLEGAMENTO - Y

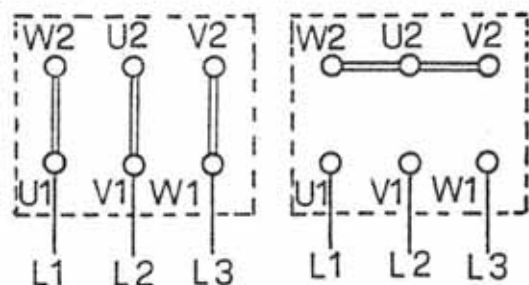

Messa a terra / Earthing

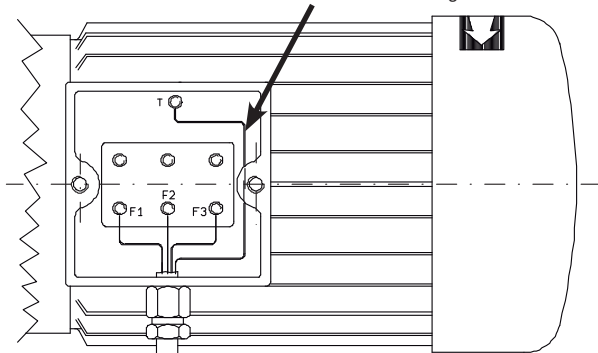

IMPORTANTE

Prestare la massima attenzione al senso di rotazione del motore. Esso deve ruotare nel senso indicato dalla freccia riportata sul carter di protezione.

IMPORTANT

Observe the direction of rotation of the motor with great care. It must rotate in the direction of the arrow that is on the casing.

Il cablaggio del motore va eseguito secondo le normative di riferimento vigenti del paese dove la centralina viene installata e deve essere realizzato a regola d'arte.

Motor wiring has to comply with the relevant regulations in force in the Country where the unit is installed and shall be performed in accordance with best practice.



CARATTERISTICHE TECNICHE
DIAGRAMMI PRESSIONE -
PORTATA - POTENZA
TECHNICAL SPECIFICATION
GRAPHS PRESSURE - DELIVERY
- POWER

CODICE FAMIGLIA
 FAMILY CODE



148

PK STD AC

Dal grafico superiore, fissata la portata richiesta **Q (l/min)** e la pressione di lavoro **p (bar)**, si ottiene la pompa più idonea. Con questo dato, nel grafico inferiore, si ottiene invece la potenza necessaria del motore (**HP**). Per un corretto funzionamento senza essere al limite delle prestazioni (in caso il motore risulti compreso tra due potenze), usare sempre quello con la potenza maggiore.

*In upper graph, by locating the delivery **Q (l/min)** and the working pressure **p (bar)**, the right pump can be obtained. With thi value, in lower graph, the power of the motor (**HP**) can be obtained. For a proper working within standard performances (if the motor is included among two different power levels) please always select the one with higher power.*



MOTORE 4 POLI / 4 POLE MOTOR
(1500 RPM)

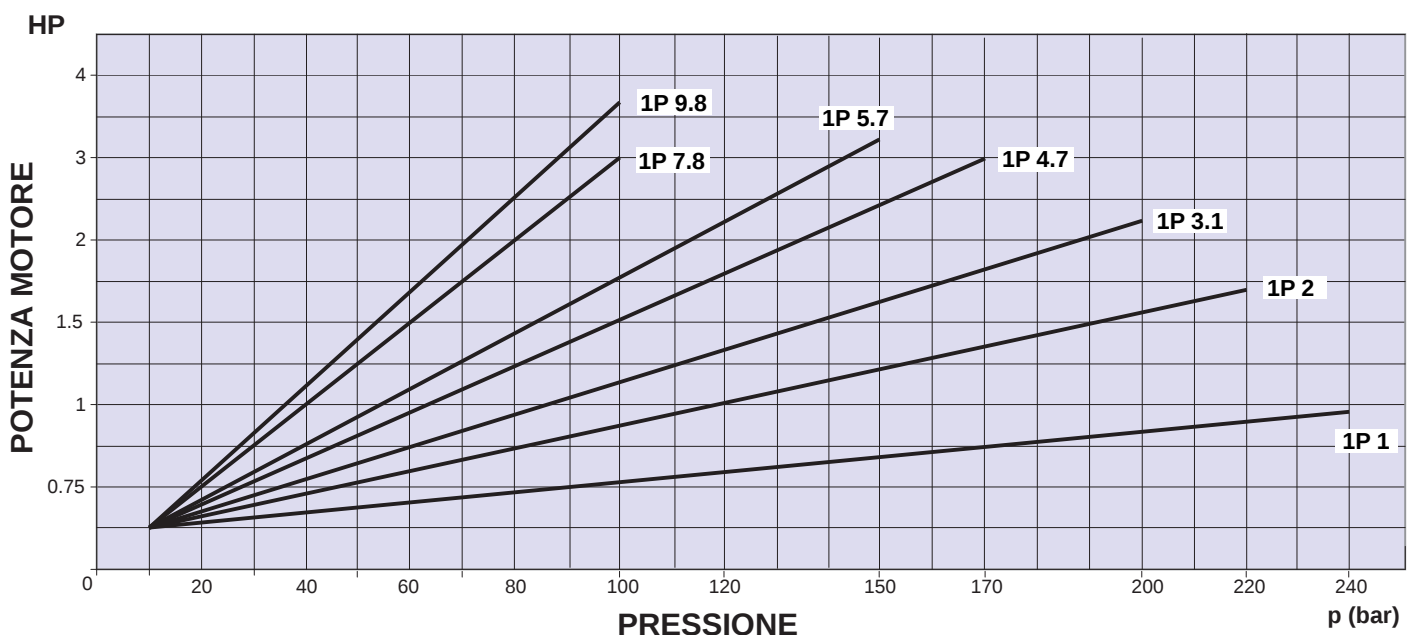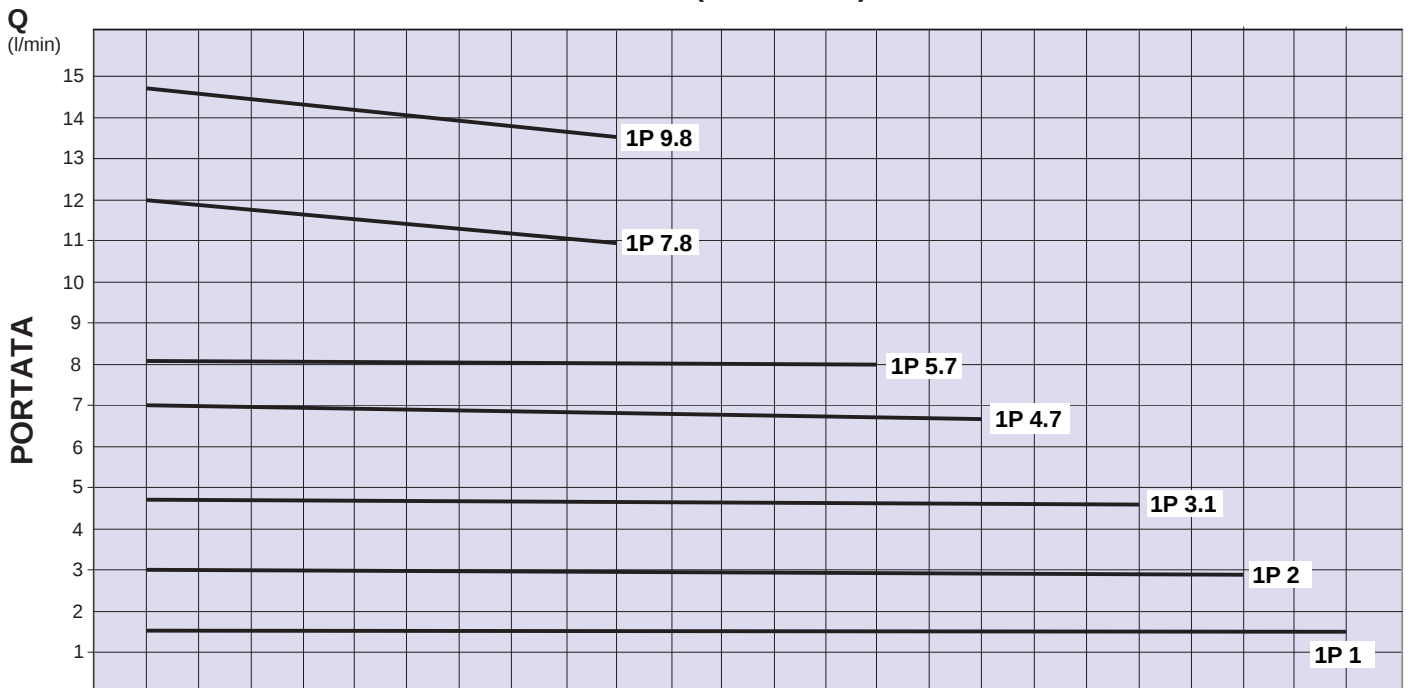

Codice fascicolo: 997-400-14810

Data: Mercoledì 16 gennaio 2013

MOTORE 2 POLI / 2 POLE MOTOR
(3000 RPM)

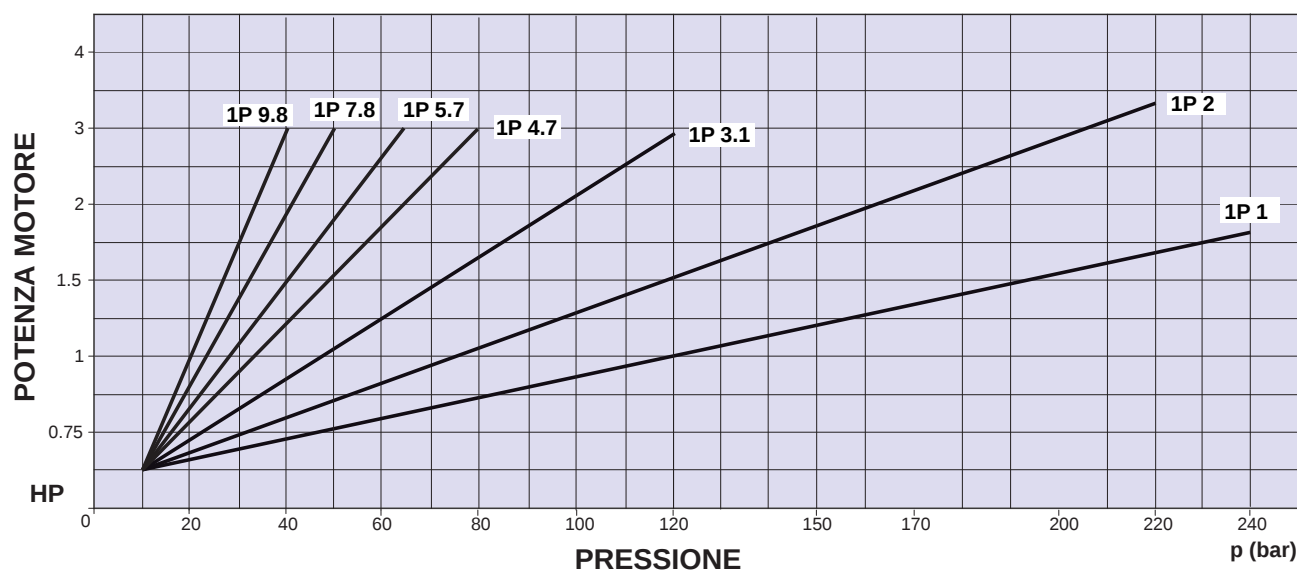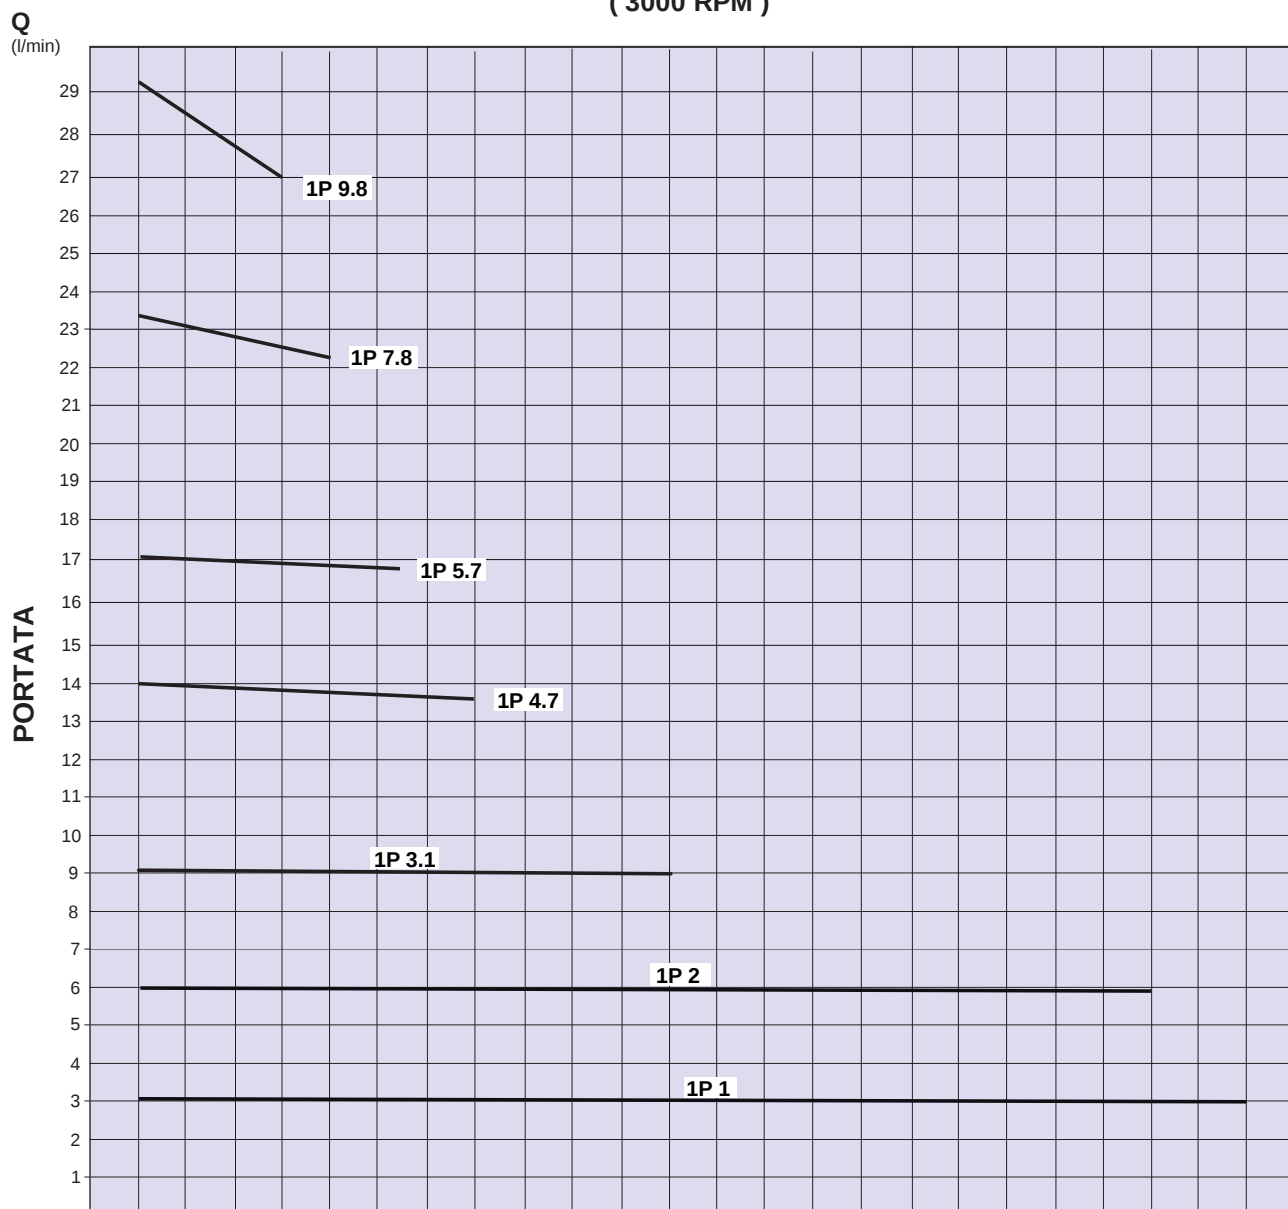

Codice fascicolo: 997-400-14810

Data: Mercoledì 16 gennaio 2013