

ELETTROPOMPA cc
VENTILATA 2000W 12-24V
VENTILATED POWER
UNIT 2000W 12-24V

CODICE FAMIGLIA
FAMILY CODE



147-358

SERIE
SERIES

EPK-PW
ventilato/ventilated



Fluido idraulico Fluid	Olio minerale Mineral oil based hydraulic fluid
Temperatura olio Oil temperature	-15 ÷ 80 °C
Viscosità Olio Oil viscosity	Da 12 a 100 cSt max. 750 cSt 12 up to 100 cSt max. 750 cSt
Grado di filtrazione Oil filtering	> 200 bar: 10 µm < 200 bar: 25 µm
Pressione di aspirazione Inlet pressure	0,7 ÷ 3 bar (Axolute)
Senso di rotazione Pump rotation	Unidirezionale (Sinistra) Unidirectional (Left)

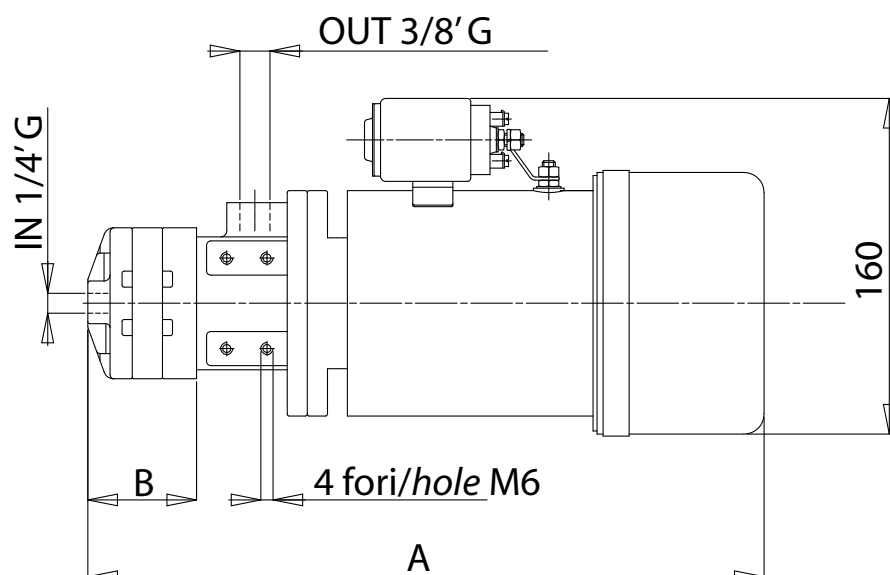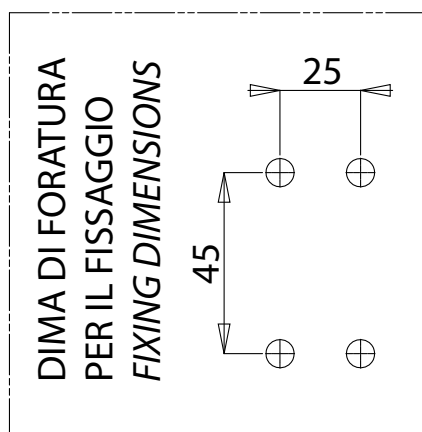

Motopompa Pump type	Pompa / Pump Cilindrata Displacement cm³/rev.	Motore Motor	A	B	Peso Weight
			mm	mm	Kg
147-358-00106	1	2000W 24V	329,5	49,9	10,2
147-358-00204	2		332	54	
147-358-00311	3,1		336,5	58,5	10,3
147-358-00473	4,7		341	65,1	11
147-358-00571	5,7		345	69,2	12
147-358-12102	1	2000W 12V	329,5	49,9	10,2
147-358-12200	2		332	54	
147-358-12317	3,1		336,5	58,5	10,3
147-358-12479	4,7		341	65,1	11
147-358-12577	5,7		345	69,2	12

pag.64

**COMPANY WITH
 QUALITY SYSTEM
 CERTIFIED BY DNV GL**
= ISO 9001:2015 =

O.M.F.B. S.p.A. Hydraulic Components
 We reserve the right to make any changes without notice.
 Edition 2009.01 No reproduction, however partial, is permitted.
 Via Cave, 7/9 25050 Provaglio d'Iseo (Brescia) Italy Tel.: +39.030.9830611
 Fax: +39.030.9839207-208 Internet:www.omfb.it e-mail:contatti@omfb.it

OMFB
HYDRAULIC COMPONENTS

Codice fascicolo: 997-400-14710

Data: Lunedì 14 febbraio 2011

Codice foglio: 997-147-35805 Rev: AB