


KIT LUBRIFICA PTO 056805/056808 056805/056808 PTO LUBRICATION KIT ALLISON 1000-2000-2500 lato destro/right side

09401100367

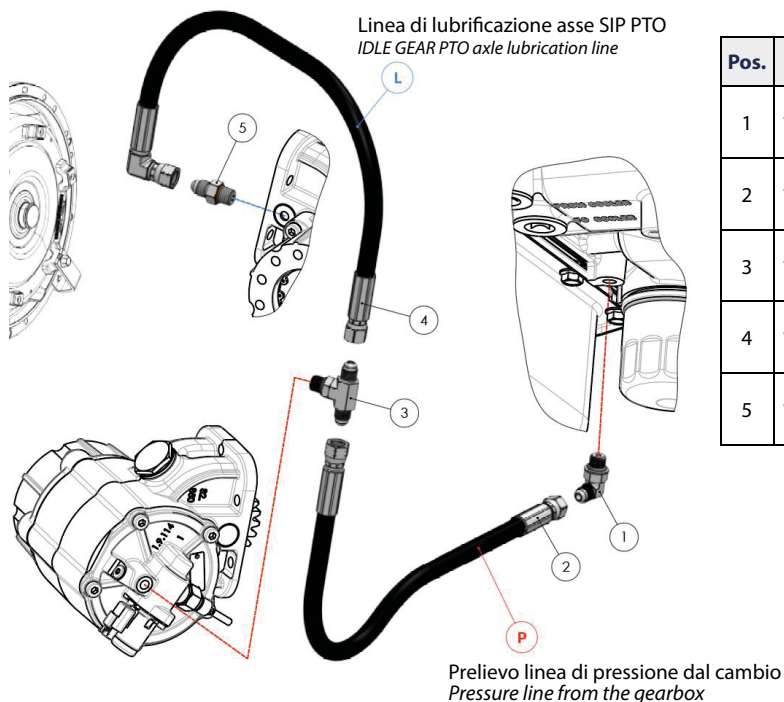


Pos.	Codice Code	Descrizione Description		Q.
1	15698000103	Raccordo orientabile 90° maschio 7/16"UNF + O.R. x 7/16" - 04JIC	90° male orientable fitting 7/16"UNF + O.R. x 7/16" - 04JIC	1
2	15699001619	Tubo flessibile SAE100 R6 DN6 L.500 FD+FD 04JIC	Flexible hose SAE100 R6 DN6 L.500 FD+FD 04JIC	1
3	15698040105	Raccordo orientabile a T maschio 7/16"UNF + O.R. x 7/16" - 04JIC	T male orientable fitting 7/16"UNF + O.R. x 7/16" - 04JIC	1
4	15699001593	Tubo flessibile SAE100 R6 DN6 L.500 FD+F90° compatta 04JIC	Flexible hose SAE100 R6 DN6 L.500 FD+F90° compact 04JIC	1
5	15698020109	Raccordo diritto maschio 7/16"UNF + O.R. FKM x 7/16" - 04JIC	Male straight fitting 7/16"UNF + O.R. FKM x 7/16" - 04JIC	1


Valori specifici di pressione forniti dal cambio a veicolo fermo Gearbox specific pressure values with vehicle not in motion

Valori Pressione a 600 rpm	Pressure value at 600 rpm
130 ÷ 240 psi (circa 9 ÷ 16,5 bar)	130 ÷ 240 psi (approx. 9 ÷ 16,5 bar)
Valori Pressione a 2100 rpm	Pressure value at 2100 rpm
220 ÷ 260 psi (circa 15 ÷ 18 bar)	220 ÷ 260 psi (approx. 15 ÷ 18 bar)


Layout di installazione sul cambio Installation layout on the transmission

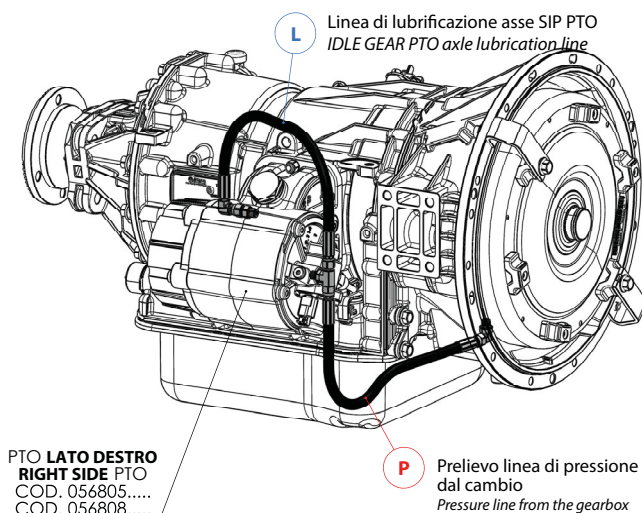

Lato destro cambio Right side gearbox

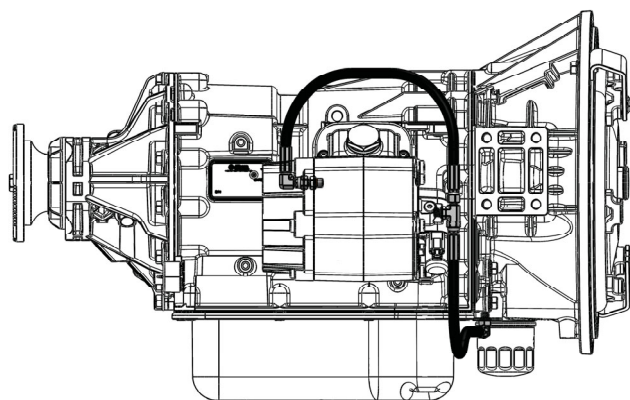

Vista lato inferiore cambio Gearbox underside view

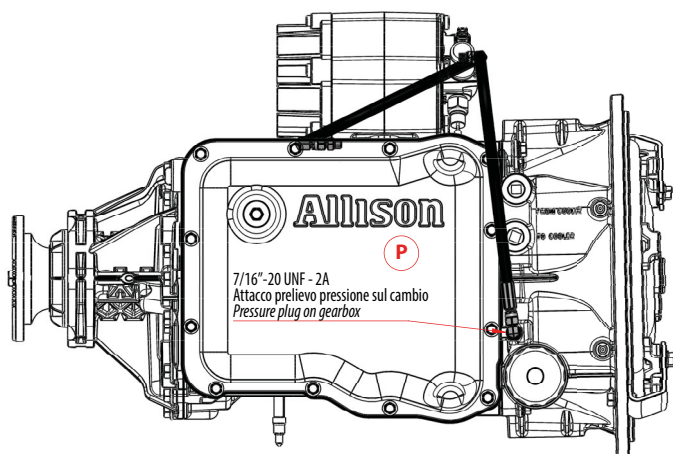

Vista posteriore cambio Gearbox rear view

