


FLANGE SAE SAE FLANGES

CODICE FAMIGLIA
FAMILY CODE

113006
113007



- Materiale: acciaio zincato
- Material: galvanized steel

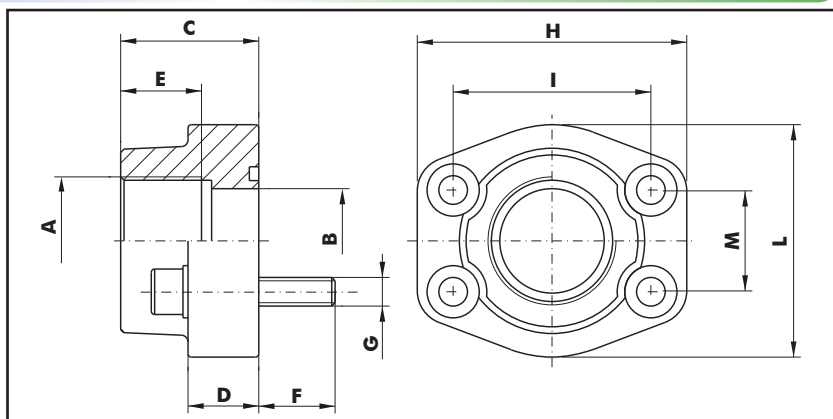

FLANGIA SAE / SAE FLANGE - 3000 psi - Viti metriche / Metric thread													
Codice / Code	Pressione esercizio max. Max. working pressure	Taglia Size	A BSPP	B	C	D	E	F	G	H	I	L	M
									Metr.				
11300600022	348 bar	1/2"	G 3/8	13	36	16	19	14	M8	57	38,1	46	17,5
11300600031		1/2"	G 1/2										
11300600040		3/4"	G 3/4	19		18	22	16	M10	65	47,6	50	22,3
11300600059		1"	G 1	25						38	70	52,4	55
11300600068	278 bar	1-1/4"	G 1-1/4	32	40	21	24	18	M12	79	58,7	68	30,2
11300600077	210 bar	1-1/2"	G 1-1/2	38	45	25				93	69,9	78	35,7
11300600086		2"	G 2	51			102	77,8	90	42,9			
11300600095	175 bar	2-1/2"	G 2-1/2	63	50	27	34	25	M16	114	88,9	105	50,8
11300600102	138 bar	3"	G 3	73						134	106,4	124	61,9

FLANGIA SAE / SAE FLANGE - 6000 psi - Viti metriche / Metric thread													
Codice / Code	Pressione esercizio max. Max. working pressure	Taglia Size	A BSPP	B	C	D	E	F	G Metr.	H	I	L	M
11300700021	420 bar	1/2"	G 3/8	13	36	16	19	14	M8	57	40,5	46	18,2
11300700030		1/2"	G 1/2										
11300700049		3/4"	G 3/4	19	35	21	22	16	M10	71	50,8	55	23,8
11300700058		1"	G 1	25	42	25	24	19	M12	81	57,2	65	27,8
11300700067		1-1/4"	G 1-1/4	32	45	27	25	22	M14	95	66,6	78	31,8
11300700076		1-1/2"	G 1-1/2	38	50	30	28	24	M16	112	79,3	94	36,5
11300700085		2"	G 2	51	65	37	30	32	M20	134	96,8	114	44,5
11300700094		2-1/2"	G 2-1/2	63	80	45	32	40	M24	180	123,8	152	58,7

FLANGIA SAE / SAE FLANGE - 3000 psi - Viti UNC / UNC thread													
Codice / Code	Pressione esercizio max. Max. working pressure	Taglia Size	A BSPP	B	C	D	E	F	G UNC	H	I	L	M
11300610020	348 bar	1/2"	G 3/8	13	36	16	19	14	5/16"	57	38,1	46	17,5
11300610039		1/2"	G 1/2										
11300610048		3/4"	G 3/4	19	18	22	16	3/8"	65	47,6	50	22,3	
11300610057		1"	G 1	25					38	70	52,4	55	26,2
11300610066	278 bar	1-1/4"	G 1-1/4	32	40	21	24	18	7/16"	79	58,7	68	30,2
11300610075	210 bar	1-1/2"	G 1-1/2	38	45	25			24	1/2"	93	69,9	78
11300610084		2"	G 2	51			30	102	77,8		90	42,9	
11300610093	175 bar	2-1/2"	G 2-1/2	63	50	27	34	25	5/8"	114	88,9	105	50,8
11300610100	138 bar	3"	G 3	73						134	106,4	124	61,9

FLANGIA SAE / SAE FLANGE - 6000 psi - Viti UNC / UNC thread													
Codice / Code	Pressione esercizio max. Max. working pressure	Taglia Size	A BSPP	B	C	D	E	F	G UNC	H	I	L	M
11300710029	420 bar	1/2"	G 3/8	13	36	16	19	14	5/16"	57	40,5	46	18,2
11300710038		1/2"	G 1/2										
11300710047		3/4"	G 3/4	19	35	21	22	16	3/8"	71	50,8	55	23,8
11300710056		1"	G 1	25	42	25	24	19	7/16"	81	57,2	65	27,8
11300710065		1-1/4"	G 1-1/4	32	45	27	25	22	1/2"	95	66,6	78	31,8
11300710074		1-1/2"	G 1-1/2	38	50	30	28	24	5/8"	112	79,3	94	36,5
11300710083		2"	G 2	51	65	37	30	32	3/4"	134	96,8	114	44,5
11300710092		2-1/2"	G 2-1/2	63	80	45	32	40	---	180	123,8	152	58,7

pag.1



HYDRAULIC COMPONENTS

O.M.F.B. S.p.A. Hydraulic Components

We reserve the right to make any changes without notice.

Edition 2017.01 No reproduction, however partial, is permitted.

Via Cave, 7/9 25050 Provaglio d'Iseo (Brescia) Italy Tel.: +39.030.9830611

Fax: +39.030.9839207-208 Internet:www.omfb.it e-mail:info@omfb.it

Data: Lunedì 03 luglio 2017

Codice foglio: 99711300610 Rev: AA