


Pneumatic 3-way high pressure diverter valve to control 2 pressure lines separately. Especially designed for applications like Tipper/Crane or Truck/Trailer.

- Flow up to 66 gpm.
- Pressure up to 5801 psi.
- Open center scheme to prevent dangerous shocks while switching.
- Body c/w anti-corrosion coating and Nickel spool.
- Guaranteed for oil temperature range -15+110 °C, viscosity range 12÷100 cSt and oil filtering 25 µm.


Dimensions

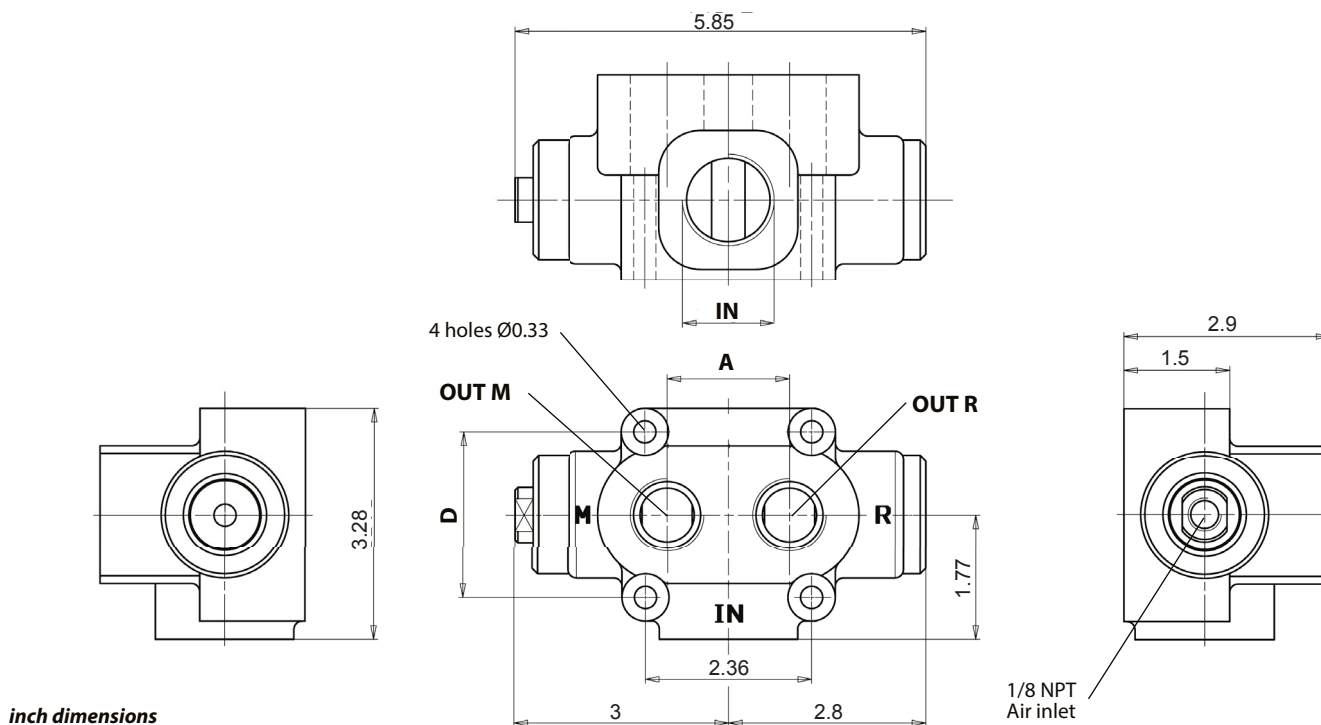

Technical features

Tipping valve type	Order code	A	D	IN - OUT M e R	Pressure values		Flow	Weight
					In service	Max. peak		
DIVERTER 250	12192000162	1,96	2,56	1 5/16-12 UN-2B	5076 psi	5801 psi	66 gpm	5,5 lb

Functional diagram



Seal kit: 12190002502

Pressure (bar)
(psi)

Pressure drops

