



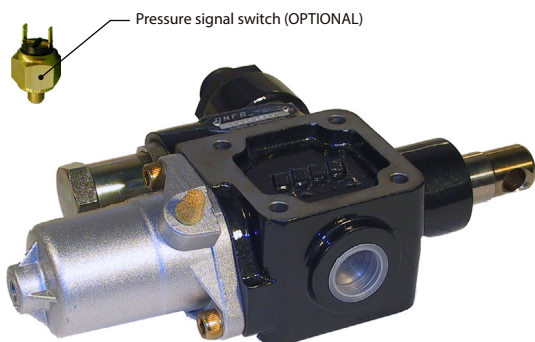

Proportional mechanical tipping valve operated by **cable controls series LINEA or LINEA BLOCK** to suit medium-heavy duty tipper trucks. Operated by proportional cab control.


- Built-in check and adjustable safety valves (direct type).
- Nodular cast-iron body for pressure up to 5801 psi.
- Either Chassis or tank (DSM kit) mounting options.
- Mechanical Direct End-of-stroke with anti-shock spring.
- Predisposition for pressure signal switch.
- Galvanized body and nickel spool.
- Guaranteed for oil temperature range -25÷80 °C, viscosity range 12÷100 cSt and oil filtering 25 µm.

Dimensions

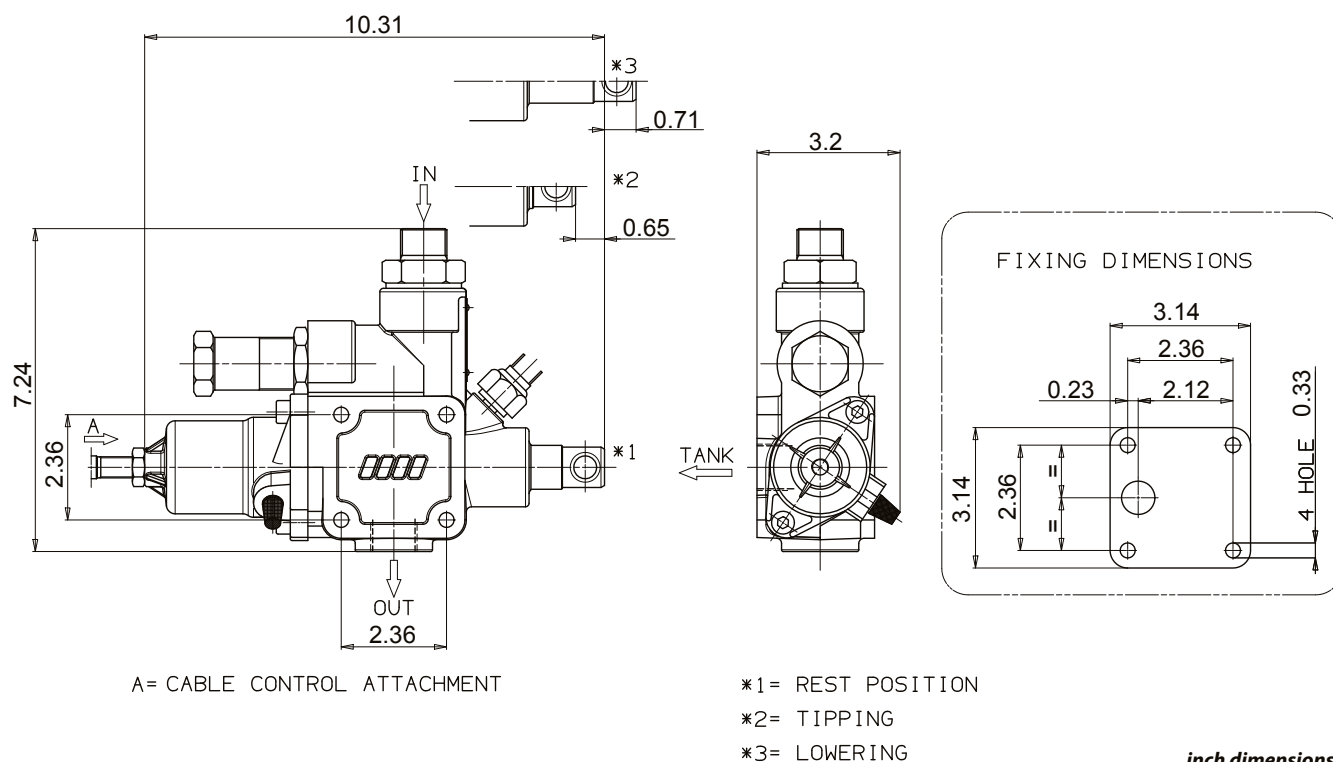


Technical features

Tipping valve type	Order code	IN	TANK	OUT	Pressure values		Flow	Weight
		ISO 228	ISO 228	ISO 228	Standard	Max.		
MODULAR 150 CE	12192200777	1 5/16-12 UN-2B	1 1/16-12 UN-2B	ISO 228	2320 psi	4061 psi	39,6 gpm	12,8 lb

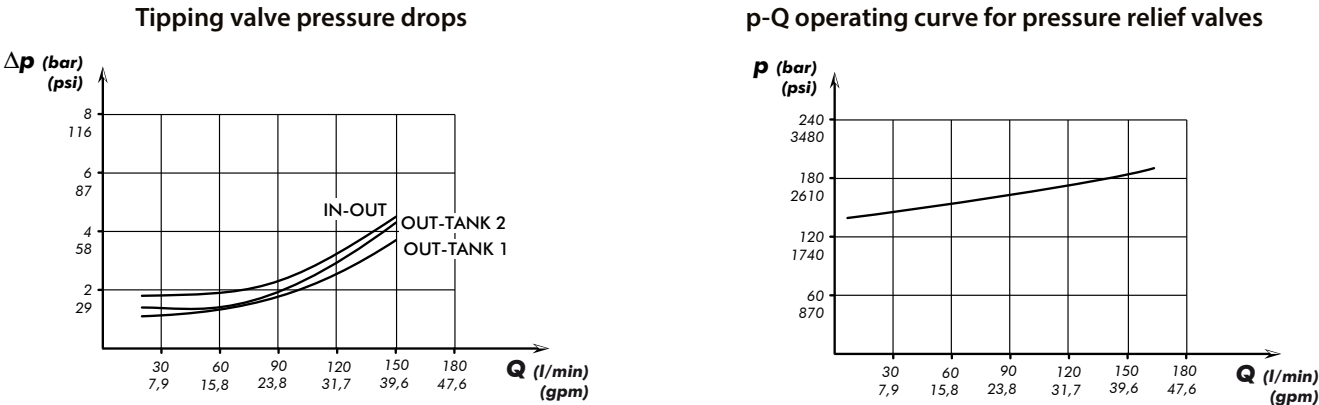


The graph refers to oil type ISO VG 46 a 50°


Mounting plate for tank
12199100112

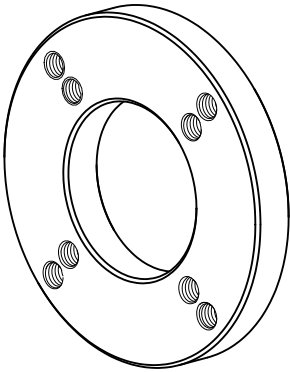

Mounting plate for tank
12199100194




Functional diagram

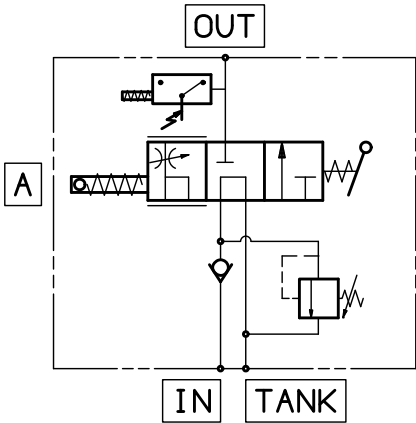

OPTIONAL
Safety sealing
12190100110



Must be ordered separately



Mounting kit p/n: 12199400459	
Q.	Description
4	Screw M8 TCE L=80
4	Washer M8
4	Spring washet M8
1	Gasket

Seal kit: 12190001209