


Ingombro / Dimensions

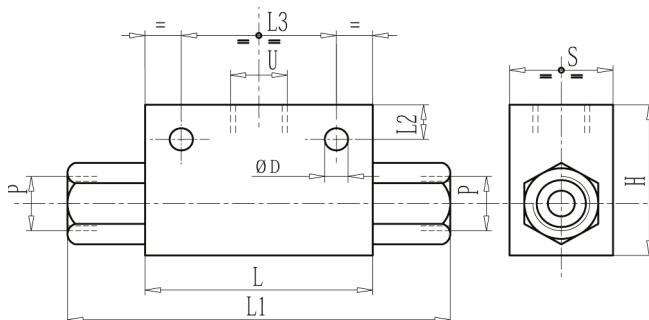

Dati tecnici / Technical features

Valvola selettoria di circuito <i>Shuttle valve</i>				Quote <i>Dimensions</i>								Peso <i>Weight</i>
Tipo <i>Type</i> gas	Codice <i>Code</i>	Portata max. <i>Max. flow</i> l/min.	Pressione max. <i>Max. pressure</i> bar	U - P gas	L mm	L1 mm	L2 mm	L3 mm	H mm	S mm	ØD mm	Kg
1/4"	12301600010	30	450 bar	1/4"	60	104	9	44	40	30	8,5	0,560
3/4"	12301600056	110	350 bar	3/4"	80	127	12	44	58	35	8,5	1,086

IMPIEGO:

Valvola utilizzata per selezionare, tra due segnali indipendenti di pressione, quello con valore maggiore ed escludere l'altro.

MATERIALI E CARATTERISTICHE:

Corpo: acciaio zincato

Guarnizioni: BUNA N standard

Tenuta: a sfera

MONTAGGIO: Collegare gli attacchi P alle linee da selezionare e U alla linea da alimentare.

USE AND OPERATION:

This valve is used to select higher pressure between two pressure lines.

MATERIALS AND FEATURES:


Body: zinc-plated steel

Seal: BUNA N standard

Tightness: ball type

APPLICATIONS: Connect ports P to the 2 lines to select and U to the line to feed.

SCHEMA IDRAULICO
HYDRAULIC SCHEME



PERDITE DI CARICO / PRESSURE DROPS CURVE

Temperatura olio: 50°C - Viscosità olio: 30cSt
Oil temperature: 50°C - Oil viscosity: 30 cSt

