Raccordi angolati a 90° in acciaio zincato per alte pressioni, particolarmente indicati per il montaggio e l'orientamento della tubazione di mandata su tutti i tipi di pompe e valvole.
La tenuta è sul piano della pompa è garantita da una rondella Dowty acciaio-gomma.

Galvanized steel made 90° high pressure fittings, suitable for connecting and orientating the pressure hose on evry type of pump or tipping valve. The sealing is guaranteed by a dowty washer.

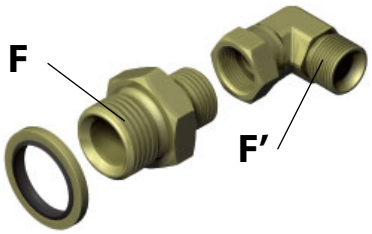

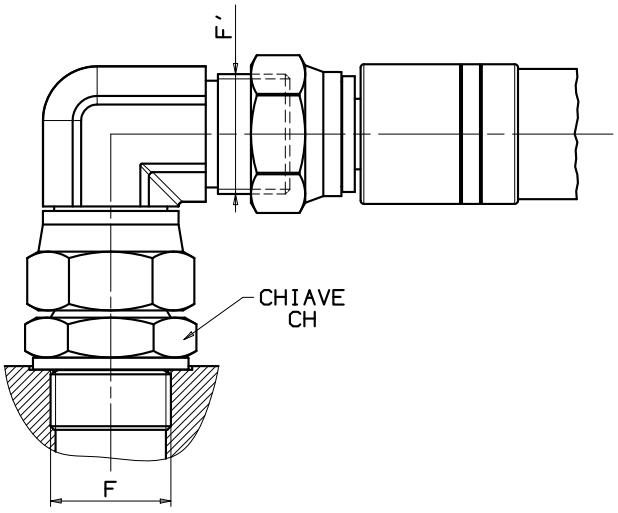

MONTAGGIO RACCORDO
• Serrare, rispettando la coppia indica in tabella, il nipplo doppio nel foro di mandata della pompa/deviatore interponendo al piano corpo pompa/deviatore la rondella acciaio-gomma (fig.1);
• Avvitare il raccordo sul nipplo doppio;
• Orientare il raccordo e serrandolo rispettando la coppia indicata in tabella;
• Verificare il corretto serraggio del nipplo doppio.

FITTING ASSEMBLY
• Screw the fitting into the tank/pump aspiration hole until the plane of the body of the pump/tank in sollimates with the center line of the cylinder surface between the two screw threads on the fitting (fig.1).
• Tighten the nut with the torque wrench.

COPPIA DI SERRAGGIO / *TIGHTENING TORQUE*	
G 1/2	80 Nm
G 3/4	100 Nm
G 1	120 Nm

FxF'	**CH**	**Codice** *Code*	**Peso** *Weight*
ISO 228	mm		kg
G ½ x G ½	27	15520000126	0,24
G ¾ x G ¾	32	15520000340	0,39
G 1 x G 1	38	15520001009	0,63
G ¾ x G 1	32 - 38	15520034100	0,61
G 1 x G ¾	38 - 32	15520010348	0,45