

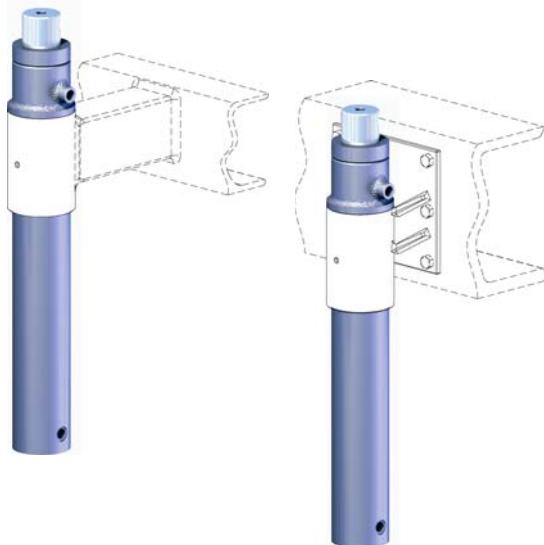
CILINDRI OLEODINAMICI PER SCARRABILI DOUBLE ACTING CYLINDER FOR SKIP LOADERS

CODICE FAMIGLIA
FAMILY CODE

166-500

**CILINDRI 60X40
CYLINDER 60X40**

Codice fascicolo: 997-400-16010



Cilindri oleodinamici doppio effetto appositamente studiati per l'allestimento di attrezzature scarrabili per casse mobili su veicoli medi e pesanti.

I cilindri possono essere fissati direttamente al telaio con gli accessori forniti separatamente:

- piastra da imbullonare al telaio
- collare da saldare ad una traversa.

Per soddisfare i requisiti della normativa macchine si consiglia l'utilizzo di valvole di blocco.

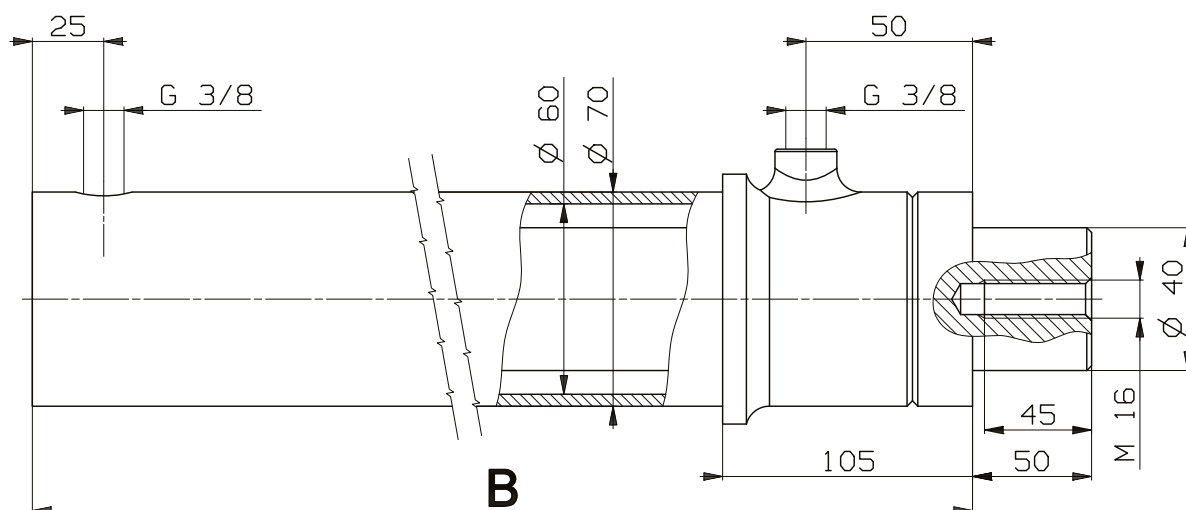
Double acting hydraulic cylinder designed for skip-loaders on medium and heavy-duty trucks.

These cylinders can be fitted through the following accessories to be ordered separately

- Plate to bolt onto the chassis.
- Collar to weld on a cross-member.

In order to match the CE safety standards we suggest using check valves.

Data: Lunedì 09 febbraio 2015



Codice foglio: 997-166-50010 Rev: AD

Codice ordinazione <i>Order Code</i>	Alesaggio <i>Diameter</i>	Stelo <i>Rod</i>	Corsa <i>Stroke</i>	B	Pressione Max. Max. pressure	Pressione esercizio Working pressure	Spinta/ <i>Thrust</i> 100 bar	Tiro/ <i>Pull</i> 100 bar	Peso / <i>Weight</i>
					bar				
166-500-60306	60	40	300	468	220	160	2826	1570	8
166-500-60351			350	518					9,5
166-500-60404			400	568					11,5


pag.17

OMFB
HYDRAULIC COMPONENTS


O.M.F.B. S.p.A. Hydraulic Components
We reserve the right to make any changes without notice.
Edition 2008.01 No reproduction, however partial, is permitted.
Via Cave, 7/9 25050 Provaglio d'Iseo (Brescia) Italy Tel.: +39.030.9830611
Fax: +39.030.9839207-208 Internet:www.omfb.it e-mail:contatti@omfb.it

**COMPANY WITH
QUALITY SYSTEM
CERTIFIED BY DNV GL
= ISO 9001:2015 =**





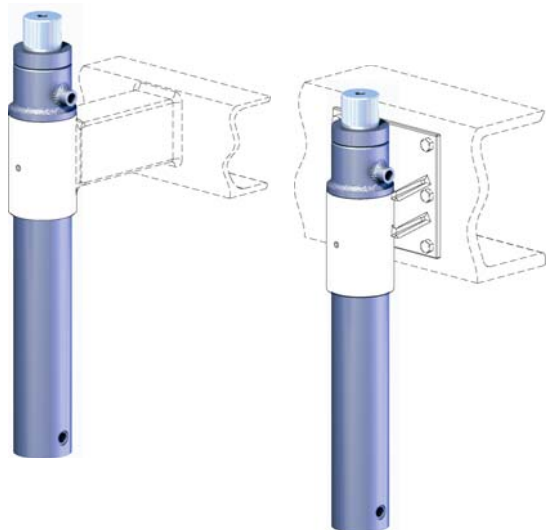
CILINDRI 80X60 CYLINDER 80X60



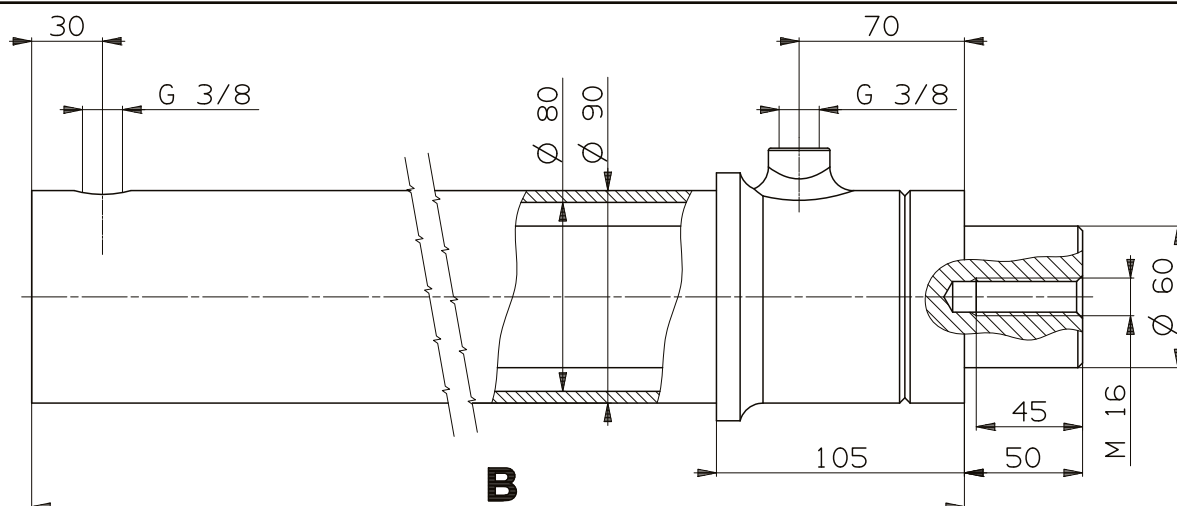PS: it is available also a version for light-duty truck having 60mm diameter and 40mm rod.



Codice ordinazione <i>Order Code</i>	Alesaggio <i>Diameter</i>	Stelo <i>Rod</i>	Corsa <i>Stroke</i>	B	Pressione Max. Max. pressure	Pressione esercizio Working pressure	Spinta/ <i>Thrust</i> 100 bar	Tiro/ <i>Pull</i> 100 bar	Peso / <i>Weight</i>
	mm	mm	mm		bar				
166-500-80302	80	60	300	495	200	120	5000	2194	18,5
166-500-80357			350	545					20,5
166-500-80400			400	595					22
166-500-80455			450	645					23,6
166-500-80508			500	695					25,2
166-500-80606			600	795					27

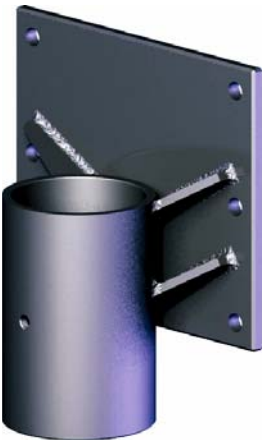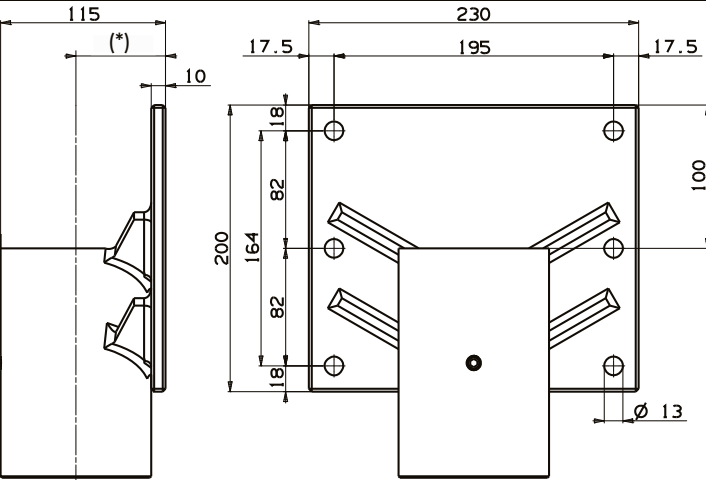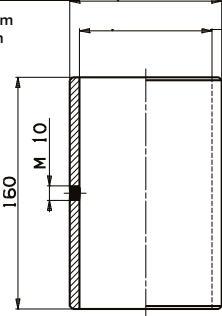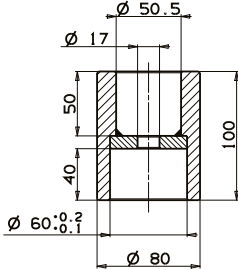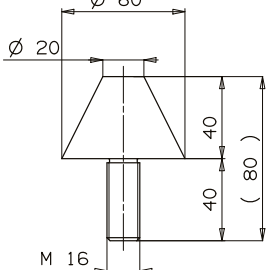Accessorio Accessories	Codice di ordinazione Order code	Ingombro overall dimensions
Piastra da imbullonare Plate to bolt on. 	166-501-00101 (ales. 80mm) 166-501-00085 (ales. 60mm)	 (*) Per cilindri alesaggio 80 = 62.5mm / alesaggio 60 = 52.5 mm (*) For cylinder diameter 80 = 62.5mm / diameter 60 = 52.5 mm
Collare da saldare Collar to weld on. 	166-501-00049 (ales. 80mm) 166-501-00021 (ales. 60mm)	alesaggio 80 = Ø 105mm alesaggio 60 = Ø 85mm diameter 80 = Ø 105mm diameter 60 = Ø 85mm alesaggio 80 = Ø 91.5mm alesaggio 60 = Ø 71.5mm diameter 80 = Ø 91.5mm diameter 60 = Ø 71.5mm 
Manicotto per traversa Coupling for cross-member. 	114-904-00121	
Puntale di centraggio Centering cone 	166-501-00209	
		155-990-00256 Kit raccordi / fittings kit 123-004-00014 Valvola di blocco 3/8" 3/8" Block valve