


SERBATOIO COMPLETO DI VALVOLA A COMANDO ELETTRICO+FINECORSA ELECTRIC TIPPING VALVE WITH TANK + END OF STROKE

FAMIGLIA / FAMILY **146**
CAPACITÀ / CAPACITY Lt **10/15**
VALVOLA / TIPPING VALVE **FE40**

99740013510

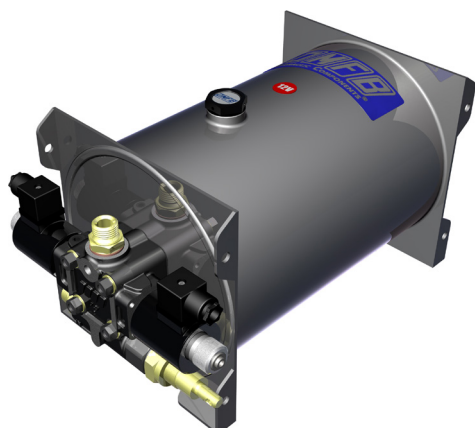


Serbatoio completo di valvola ad azionamento meccanico, per il comando di ribaltabili leggeri, con schema idraulico a centro aperto in accordo alle direttive CE.


- Valvola di ritegno e valvola di massima pressione registrabile incorporate;
- Predisposizione per segnalatore di pressione;
- Corpo valvola protetto da cataforesi nera, cursore nichelato e serbatoio verniciato con polveri epossidiche grigie (RAL 7020);
- Garantito per lavorare con olio a temperature -25÷80 °C, campo di viscosità 12÷100 cSt e grado di filtrazione 25 µm;

Oil tank with mechanically-activated tipping valve to suit light duty tipper trucks. Open centre hydraulic layout according to CE standards.

- Built-in adjustable safety valves.
- Ready for pressure signal switch mounting
- Cataphoresis coated valve body, nickel spool and tank painted with grey epoxy powder (RAL 7020);
- Guaranteed for working with oils at -25÷80 °C, viscosity range 12÷100 cSt and oil filtering level of 25 µm.

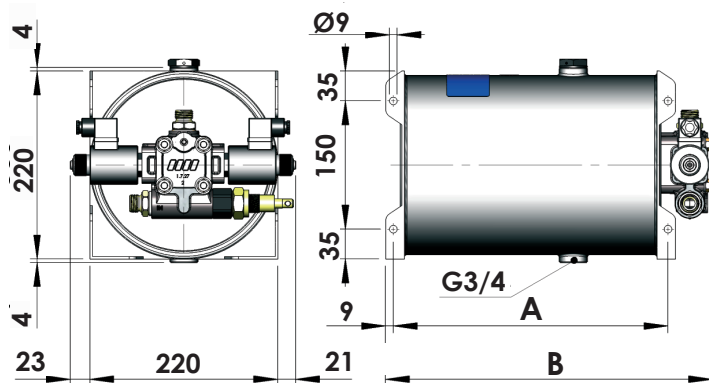

N°	Codice Code	Descrizione Description	Q.
1	50500300015	Dado M8 / Nut M8	4
2	50100700064	Rondella M8 / Washer M8	4
3	12100400554	Valvola 12V / Tipping valve 12V	1
	12100400563	Valvola 24V / Tipping valve 24V	
4	50700300235	Guarnizione / Gasket	1
5	51400211103	Serbatoio 10 l / Tank 10 l	1
	51400211158	Serbatoio 15 l / Tank 15 l	
6	50900500015	Tappo sfio / Breather cap	1

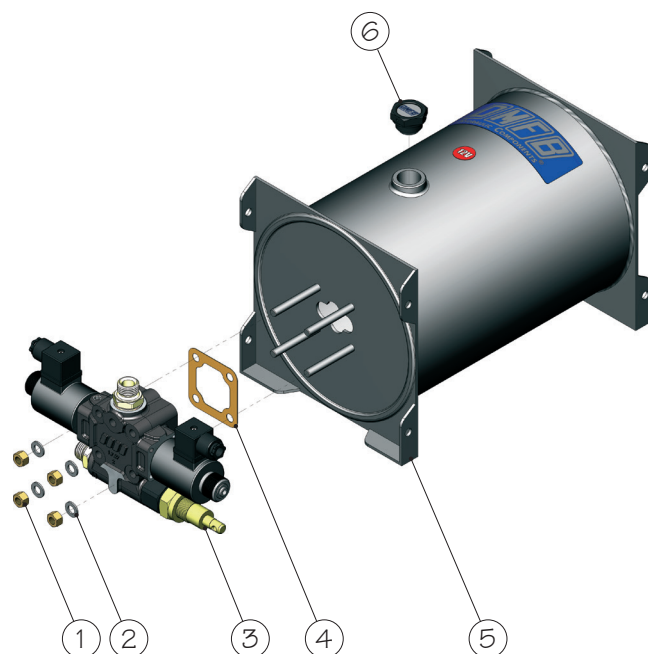

27/04/2021

Tipo Type	Codice ordinazione Order code	Capacità serbatoio Tank's capacity l	Portata valvola Valve Flow l/min	A mm	B mm	Pressioni Pressure values	
						Taratura standard Standard setting bar	Taratura massima Maximum setting bar
				DSE-10 CE 12V	14602610125	10	40
DSE-10 CE 24V	14602610241	322	382				
DSE-15 CE 12V	14602615120	15	472	532			
DSE-15 CE 24V	14602615246		472	532			

99714602610 Rev: AD

pag.89

OMFB
HYDRAULIC COMPONENTS

O.M.F.B. S.p.A. Hydraulic Components
We reserve the right to make any changes without notice.
Edition 2004.09 No reproduction, however partial, is permitted.
Via Cave, 7/9 25050 Provaglio d'Iseo (Brescia) Italy Tel.: +39.030.9830611
Fax: +39.030.9839207-208 Internet:www.omfb.it e-mail:contatti@omfb.it

COMPANY WITH
QUALITY SYSTEM
CERTIFIED BY DNV GL
= ISO 9001:2015 =