

MARTINETTI TELESCOPICI

SERIE PESANTE

TELESCOPIC JACKS

HEAVY SERIES


CODICE FAMIGLIA
FAMILY CODE

139004

MASP

Martinetti tipo **MASP** con perni di ancoraggio sul cilindro e stelo uscente sferico. Sono completi di supporto sferico montato sull'estremità dello stelo di raccordo per attacco tubazione olio.

MASP jacks with anchoring pins on cylinder and spherical projecting rod. Complete with spherical support on end of rod and union for connecting oil hose.

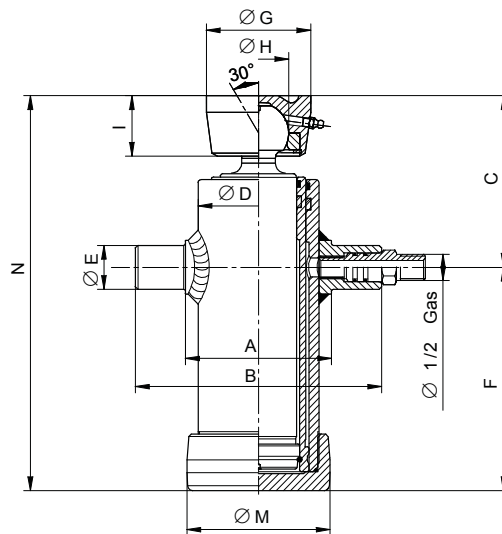

Codice di ordinazione Order code	Corsa Stroke	N° Sfilate Extensions n°	Ø Sfilata (mm) e Spinta (ton) Extension Ø (mm) and Capacity (ton)							Dimensioni d'ingombro Cylinder dimensions										Peso Weight	Volume olio Oil volume	
	mm	N°	68 ton. 6,5	88 ton. 10,9	107 ton. 16,1	126 ton. 22,4	145 ton. 29,7	165 ton. 38,4	187 ton. 49,4	A	B	C	D	E	F	G	H	I	M	N	Kg	l
13900400011	595	2								130	210	150	106	35	315	95	55	55	122	465	29	3
13900400020	695								365						515					32	3,5	
13900400048	795								415						565					35	4	
13900400039	695								365			107			65		60	520	33	5,3		
13900400244	1095								565									570	45	8,3		
13900400057	746	3								150	230	152	124	40	265	95	55	55	144	417	35	4,7
13900400066	785								280						432					36	5	
13900400075	893								315						467					38	5,7	
13900400084	1043								365			517			42					6,6		
13900400093	1283											445			597					49	8,2	
13900400100	1273	4								175	265	162	152	45	278	95	55	55	172	610	57	12
13900400119	1040								325						440					49,5	8,3	
13900400128	1220								395						487					55	9,7	
13900400137	1500								445			557			63					12		
13900400146	1700											607			69					13,5		
13900400155	1490	5								210	300	244	170	50	320	107	65	60	193	564	69	16,8
13900400164	1690								370						614					76	19	
13900400173	1970								440						684					84	22,2	
13900400182	1870								320			565			81,5					18,2		
13900400191	2120								370			615			88,5					20,6		
13900400235	2050	6								250	350	258	215	190	375	150	73	69	245	633	131	36
13900400262	1795								325						583					121	31	
13900400271	2450								440						915					103,5	32,8	
13900400253	1755	6								250	350	260	215		255	150	73	69	245	515	110	28

PRESSIONE MAX. DI ESERCIZIO 180 BAR - WORKING MAX. PRESSURE 180 BAR

pag.19



O.M.F.B. S.p.A. Hydraulic Components
We reserve the right to make any changes without notice.
Edition 2006.10 No reproduction, however partial, is permitted.
Via Cave, 7/9 25050 Provaglio d'Iseo (Brescia) Italy Tel.: +39.030.9830611
Fax: +39.030.9839207-208 Internet:www.omfb.it e-mail:contatti@omfb.it

**COMPANY WITH
QUALITY SYSTEM
CERTIFIED BY DNV GL
= ISO 9001:2015 =**

16/12/2019

99740013910

06/11/2019

99713900401 Rev: AA