

# SERBATOIO COMPLETO DI VALVOLA A COM. ELETTRICO SENZA FINECORSA ELECTRIC TIPPING VALVE WITH TANK - WITHOUT END OF STROKE

FAMIGLIA / FAMILY **146**  
CAPACITÀ / CAPACITY Lt **20**  
VALVOLA / TIPPING VALVE **FE40**

99740013510




Serbatoio completo di valvola ad azionamento meccanico, per il comando di ribaltabili leggeri, con schema idraulico a centro aperto in accordo alle direttive CE.

- Valvola di ritegno e valvola di massima pressione registrabile incorporate;
- Predisposizione per segnalatore di pressione;
- Corpo valvola protetto da cataforesi nera, cursore nichelato e serbatoio verniciato con polveri epossidiche grigie (RAL 7020);
- Garantito per lavorare con olio a temperature  $-25 \div 80$  °C, campo di viscosità  $12 \div 100$  cSt e grado di filtrazione 25  $\mu$ m;

Oil tank with mechanically-activated tipping valve to suit light duty tipper trucks. Open centre hydraulic layout according to CE standards.

- Built-in adjustable safety valves.
- Ready for pressure signal switch mounting
- Cataphoresis coated valve body, nickel spool and tank painted with grey epoxy powder (RAL 7020);
- Guaranteed for working with oils at  $-25 \div 80$  °C, viscosity range  $12 \div 100$  cSt and oil filtering level of 25  $\mu$ m.

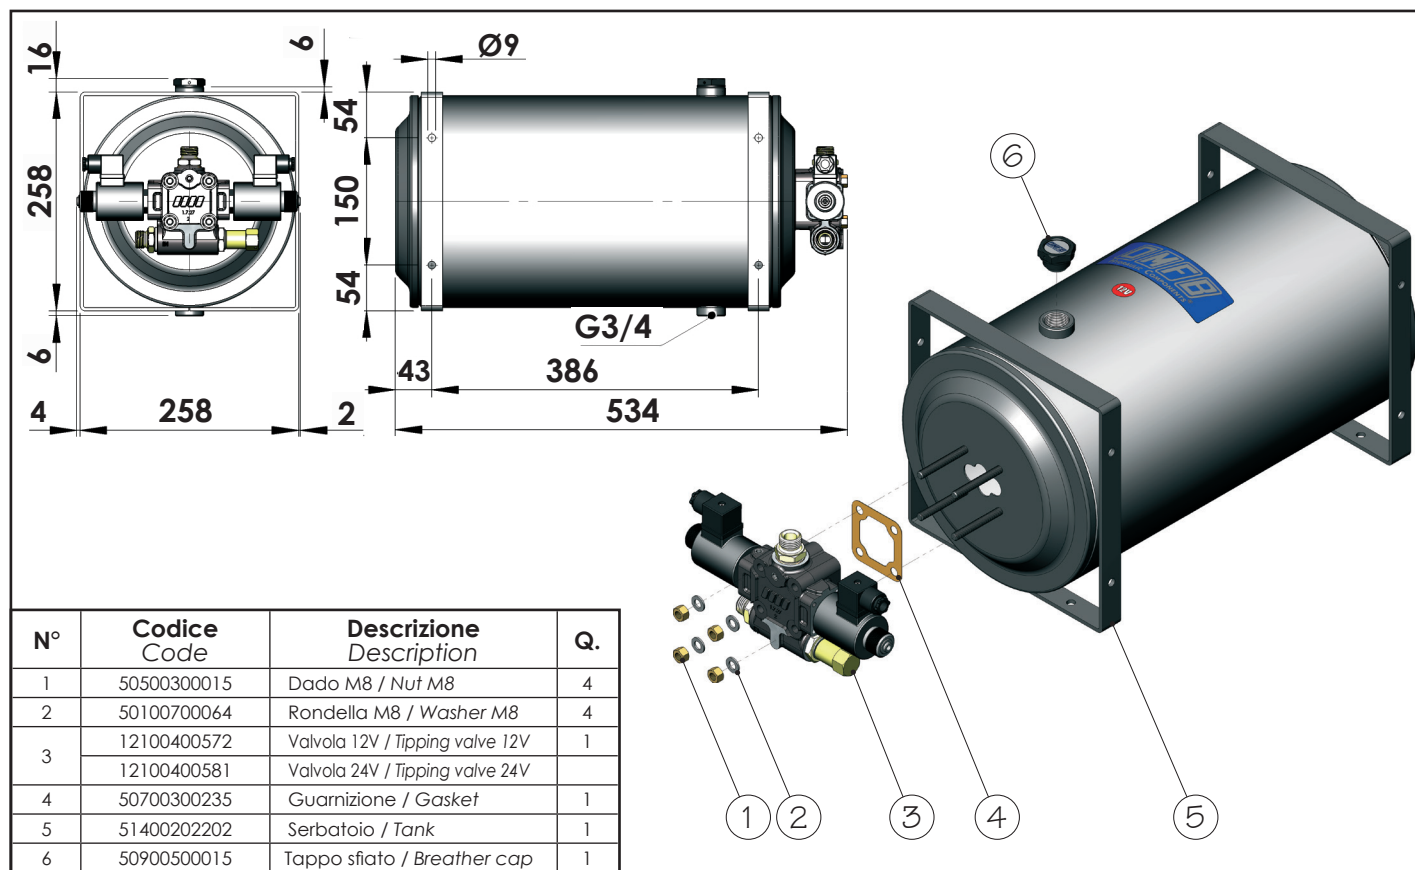

27/04/2021

99714602720 Rev: AC

Tipo Type	Codice ordinazione Order code	Capacità serbatoio Tank's capacity l	Portata valvola Valve Flow l/min	Pressioni Pressure values	
				Taratura standard Standard setting bar	Taratura massima Maximum setting bar
DSE-20 CE 12V	14602720122	20	40	140	240
DSE-20 CE 24V	14602720248				

pag.95



O.M.F.B. S.p.A. Hydraulic Components  
We reserve the right to make any changes without notice.  
Edition 2004.09 No reproduction, however partial, is permitted.  
Via Cave, 7/9 25050 Provaglio d'Iseo (Brescia) Italy Tel.: +39.030.9830611  
Fax: +39.030.9839207-208 Internet:www.omfb.it e-mail:contatti@omfb.it

COMPANY WITH  
QUALITY SYSTEM  
CERTIFIED BY DNV GL  
= ISO 9001:2015 =