


**CODICE KIT:
302-1-302**

SCHEMA ELETTRICO

TAB.:997-302-130
DATE: 13-09-2001
REV: AB

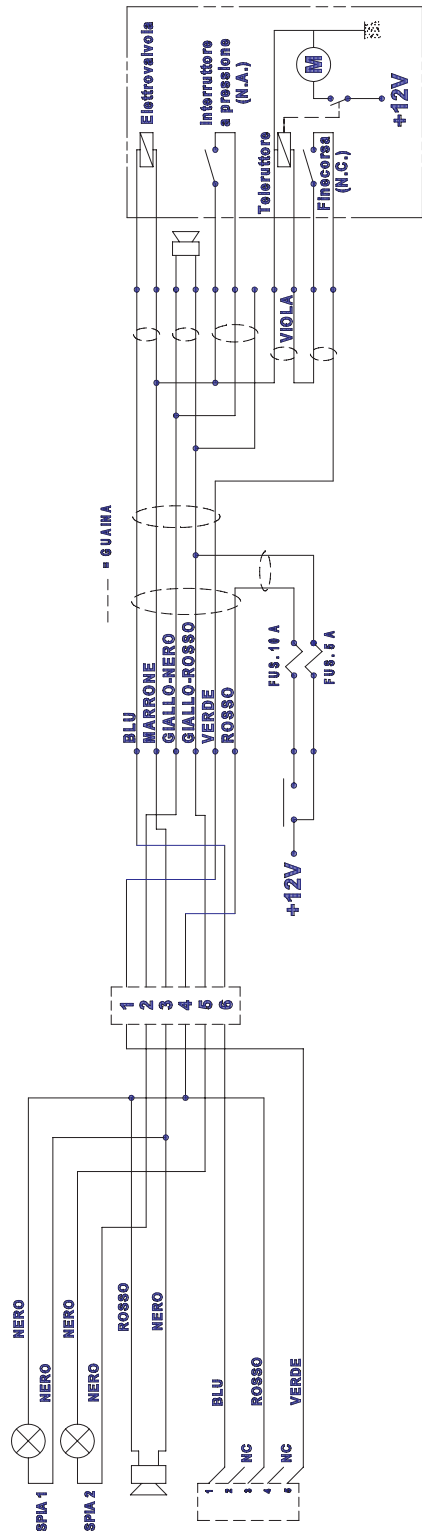

COMPANY
WITH QUALITY SYSTEM
CERTIFIED BY DNV
ISO 9001

O.M.F.B. SPA HYDRAULIC COMPONENTS
We reserve the right to make any changes without notice.
Edition 2001.03 No reproduction, however partial, is permitted.
Via Cave, 7/9 25050 Provaglio d'Iseo (Brescia) Italy
Tel.:0309830611 Fax:030983825 Internet:www.omfb.it

OMFB
HYDRAULIC COMPONENTS

IMPIANTI ELETTRICI A NORMA "CE" PER RIBALTABILI CON CENTRALINA ELETTRICA 12/24V

TAB.:997-302-130

DATE: 13-09-2001

REV: AB

**GLI IMPIANTI ELETTRICI OMFB PER RIBALTABILI SONO
DISPONIBILI IN DIVERSE CONFIGURAZIONI A SECONDA
DELLE ESIGENZE**

| | CABINA FISSA  | CABINA RIBALTABILE  |
|-----------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------|
| PULSANTIERA MOBILE CODICE 302-1-106 (PASSAGGIO RETROCABINA) | SI | NO |
| PULSANTIERA MOBILE CODICE 302-1-151 (PASSAGGIO VANO MOTORE) | SI | SI |
| CON PLANCIA SUL CRUSCOTTO CODICE 302-1-302 (PASSAGGIO VANO MOTORE) | SI | SI |
| CON DOPPIO COMANDO CODICE 302-1-400 (PASSAGGIO VANO MOTORE) | SI | SI |

L'impianto comprende lo staccabatteria e il segnalatore acustico intermittente da 95 dB esterno.
Il fincorsa va ordinato a parte, si può utilizzare il cod. 149-150-102 oppure la staffa completa 121-51-39.

I cablaggi rispondono alla norma CEI EN 60204-1, le funzioni comandate dai singoli fili sono identificate dai colori degli stessi.

L'involucro dei fili è in materiale non propagante la fiamma secondo la norma CEI EN 60204-1

E' possibile ordinare a parte i cavi di alimentazione con fusibile di protezione da 200 A nelle diverse lunghezze come da tabella:

(Cavo sezione 35 mm² con guaina in nylon e cappucci isolanti)

| CAVO (-) | CAVO (+) BATTERIA → STACCABATTERIA | CAVO (+) STACCABATTERIA → PK/RE | CODICE |
|----------|---------------------------------------|------------------------------------|-----------|
| 1 metro | 2 metri | 1 metro | 302-5-200 |
| 1 metro | 3 metri | 1 metro | 302-5-308 |
| 1 metro | 4 metri | 1 metro | 302-5-406 |
| 1 metro | 5 metri | 1 metro | 302-5-504 |

COMPANY
WITH QUALITY SYSTEM
CERTIFIED BY DNV
ISO 9001

O.M.F.B. SPA HYDRAULIC COMPONENTS
We reserve the right to make any changes without notice.
Edition 2001.03 No reproduction, however partial, is permitted.
Via Cave, 7/9 25050 Provaglio d'Iseo (Brescia) Italy
Tel.:0309830611 Fax:030983825 Internet:www.omfb.it

OMFB
HYDRAULIC COMPONENTS

CODICE KIT:
302-1-302

KIT ELETTRICO PK-RE PLANCIA-CRUSCOTTO IMPIANTO LUNGO CON SEGNALATORE ACUSTICO

TAB.:997-302-130
DATE: 13-09-2001
REV: AB

